



Wafer Check Valves (Dual Disc)



| Materials | |
|---------------|---------------------|
| PART | MATERIAL |
| Body | Cast Iron |
| Spring | 316 Stainless Steel |
| Disc | 316 Stainless Steel |
| Seat | NBR |
| Shaft 1 | 316 Stainless Steel |
| Shaft 2 | 316 Stainless Steel |
| Flange Gasket | NBR |

| Specifications | |
|-------------------------|------------|
| Flange | AS2129 T/E |
| Cold Working Pressure | 1600kPa |
| MAX Working Temperature | 80°C |

Applications - Water Oil, Gas

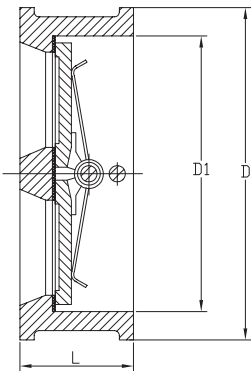

| Wafer Check Valve (Dual Disc) | | | | | |
|-------------------------------|---------------|-----|-----|-----|---------------|
| AAP CODE | IMPERIAL SIZE | D | D1 | L | APPROX. KG/PC |
| WVC50 | 2 | 96 | 65 | 43 | 1.5 |
| WVC65 | 2 1/2 | 109 | 80 | 48 | 2 |
| WVC80 | 3 | 128 | 94 | 64 | 2.8 |
| WVC94 | 4 | 160 | 117 | 64 | 4.1 |
| WVC95 | 5 | 191 | 145 | 70 | 6.4 |
| WVC96 | 6 | 213 | 170 | 76 | 8.5 |
| WVC98 | 8 | 270 | 224 | 89 | 13.5 |
| VWCX25 | 10 | 333 | 265 | 114 | 22 |
| VWCx30 | 12 | 381 | 312 | 114 | 30 |
| VWCX35 | 14 | 445 | 360 | 127 | 48 |
| VWCX40 | 16 | 496 | 410 | 140 | 65 |
| VWCX45 | 18 | 555 | 450 | 152 | 78 |
| VWCX50 | 20 | 610 | 500 | 154 | 110 |
| VWCX60 | 24 | 720 | 624 | 178 | 157 |


Wafer Check Valve 'Dual Disc' ANSI 150 (Viton Seat)



| Materials | |
|-----------|---------------------|
| PART | MATERIAL |
| Body | WCB |
| Seat | Viton |
| Disc | 304 Stainless Steel |

| Specifications | |
|-------------------------|------------|
| Flange | ANSI B16.5 |
| Cold Working Pressure | 1965kPa |
| MAX Working Temperature | 150°C |

Applications - Water, Oil, Gas, High Pressure Liquids

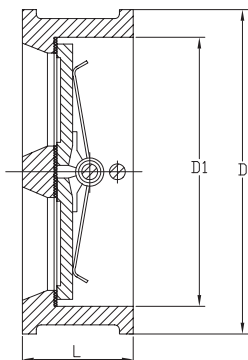

| Wafer Check Valve 'Dual Disc' ANSI 150 (Viton Seat) | | | | | |
|---|---------------|-----|-----|----|---------------|
| AAP CODE | IMPERIAL SIZE | D | D1 | L | APPROX. KG/PC |
| WCCS15050 | 2 | 103 | 65 | 42 | 1.5 |
| WCCS15080 | 3 | 134 | 95 | 64 | 3.5 |
| WCCS15094 | 4 | 164 | 118 | 64 | 4.8 |