

# Irritrol®



The Irritrol® 200B Series globe/angle valves have built their popularity on a proven record of reliability and a reputation for offering valuable features at an affordable price. The 200B Series provides manual internal and external bleed, heavy-duty, UV-resistant PVC construction, stainless steel hardware, a double-beaded diaphragm and a captive solenoid plunger.

## 200B SERIES VALVES

---

### HEAVY-DUTY, CORROSION- AND UV-RESISTANT PVC CONSTRUCTION WITH STAINLESS STEEL SPRING AND HARDWARE

Provides consistent operation

---

### SLOW-CLOSING DESIGN

Reduces water hammer and resulting stress on the system

---

### RUGGED, DOUBLE-BEADED CHEMICAL RESISTANCE DIAPHRAGM

Ensures a leak-proof seal

---

### INTERNAL AND EXTERNAL BLEED (FLUSH MODE)

Allows for manual operation

---

### ACCEPTS OMNIREG® MODULAR PRESSURE REGULATOR

Ensures consistent performance

---

### HIGH-STRENGTH RIBBED BONNET AND BOTTOM INLET

Increases durability

---

### THREE-WAY STAINLESS STEEL SCREWS

Screws accept Phillips, flat-blade and hex-driver tools for easy servicing without removal from the system

---



ELECTRIC GLOBE/ANGLE  
1", 1½", AND 2" PLASTIC MODELS

IRRITROL.COM

## ADDED FEATURES

- Flow control allows precise adjustment and manual shutoff
- Buna-N valve seat seal
- Unique threaded inlet plug O-ring seal prevents leaks
- Encapsulated injection-molded solenoid with a captive hex plunger
- Five-year warranty

## OPERATING SPECIFICATIONS

- Flow range: 5-120 GPM
- Pressure range: 20-150 psi

## ELECTRICAL SPECIFICATIONS

- Solenoid: 24 V ac
- Inrush volt-amp: 24 V ac-9.6 VA
- Inrush current: .4 amp
- Holding volt-amp: 24 V ac-4.8 VA
- Holding current: .2 amp

## MODELS

Model	Description
214B	1" NPT threads, flow control
216B	1½" NPT threads, flow control
217B	2" NPT threads, flow control

## DIMENSIONS

- **214B:** H: 6 ½", W: 2 ½", L: 4 ½"
- **216B:** H: 7 ¾", W: 4 ¼", L: 5 ½"
- **217B:** H: 8 ¾", W: 5 ⅜", L: 6 ¼"


## SPECIFYING INFORMATION

MODEL	SIZE
<b>21</b> - 200B Series electric valve	4 - 1" size 6 - 1½" size 7 - 2" size

Example: A 200B Series 1" electric valve = **214B**

## OPTIONAL ACCESSORIES

- A** Recycled-water solenoid kit (RW60-KIT); purple solenoid with purple warning tag
- B** DC latching solenoid (DCL)  
*Note: Maximum pressure for a valve that utilizes latching solenoid is 120 psi.*
- C** OmniReg® regulator (OMR-30 & OMR-100)

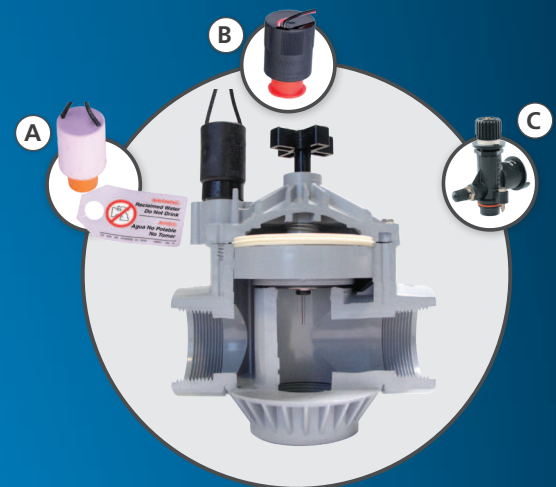

• Optional accessories are field-installable. Must specify separately if required.

## PRESSURE LOSS DATA

MODEL	SIZE	GLOBE ANGLE	Flow Rate - GPM													
			5	10	15	20	30	40	50	60	80	100	120			
214B	1"	G	3.36	2.60	1.82	2.35	5.40									
		A	3.09	2.20	1.48	1.98	4.00									
216B	1½"	G				3.04	2.66	2.33	2.97	4.14	5.62					
		A				2.76	2.24	1.99	2.30	3.10	4.42					
217B	2"	G				2.00	1.93	1.73	1.55	1.68	2.99	4.85	6.31			
		A				2.00	1.93	1.73	1.55	1.59	2.15	3.27	4.88			

Pressure loss data are derived from valves independently tested by CIT, Fresno, CA.



We reserve the right to improve our products and make changes in the specifications and designs without notice and without incurring obligation. Products depicted in this brochure are for demonstration purposes only. Actual products offered for sale may vary in design and features.